



## Assembly

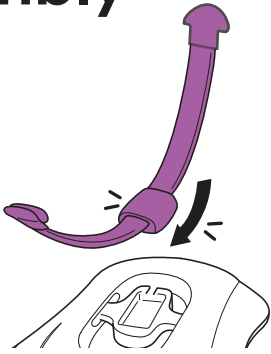


1.

Insert the front of the central rail into the grooves in the front of the rocking trolley. Then push the rail down until you hear a click.

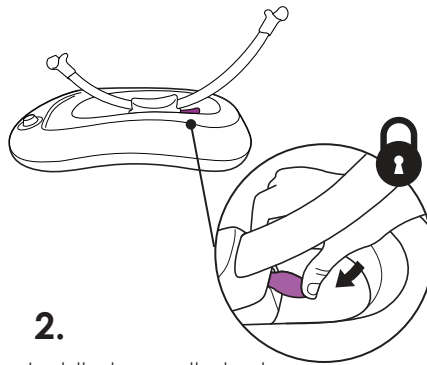

2.

Lock the lever on the back of the rocking trolley.

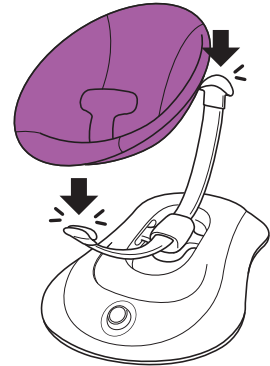


3.

Insert seat ring into the center support rail until you hear it click at both the top and bottom.




4.

Pull the seat fabric over the toy bar opening and snap into place.

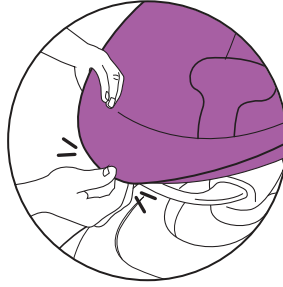


5.

Pull the bottom of the seat fabric down and snap into place.

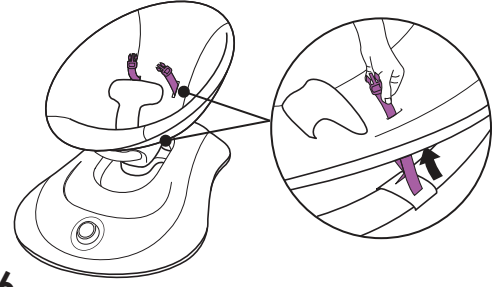


6.

Pull child restraint harness through back of the seat fabric.

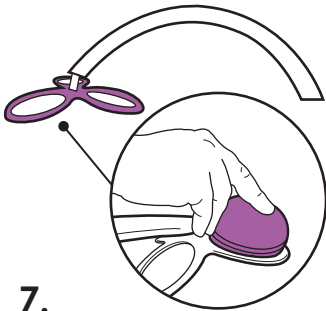


7.

Place toy balls into the toy ball ring.

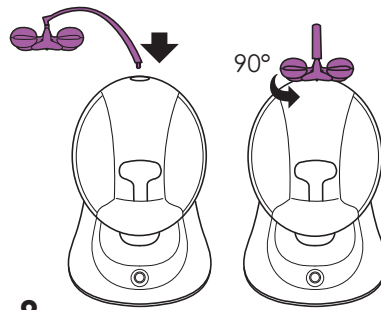


8.

Install the toy bar by inserting the bar to the side and turning 90 degrees so it is facing forward.

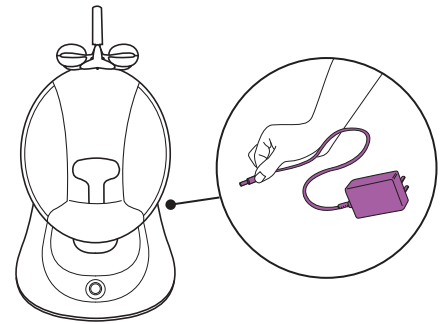


9.

Once assembled, plug into power supply.

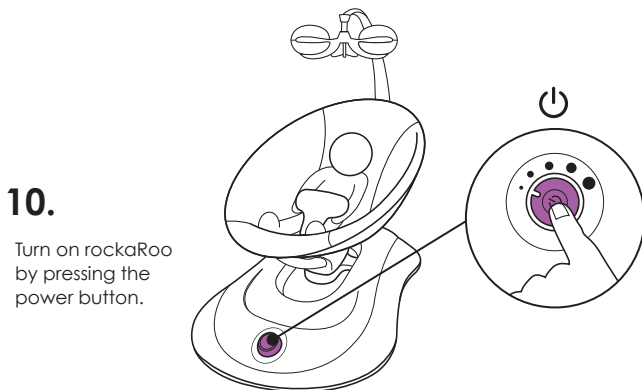

10.


Turn on rockaRoo by pressing the power button.

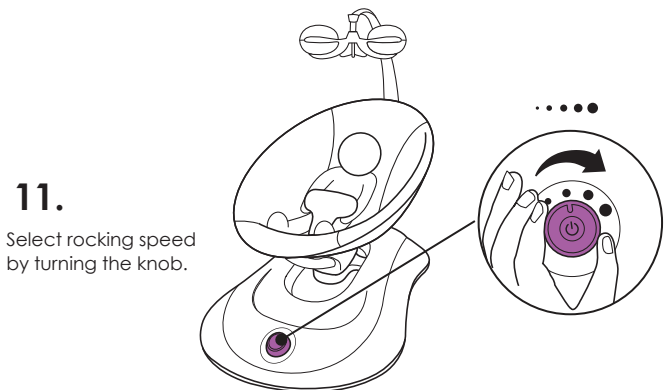

11.


Select rocking speed by turning the knob.

# Disassembly

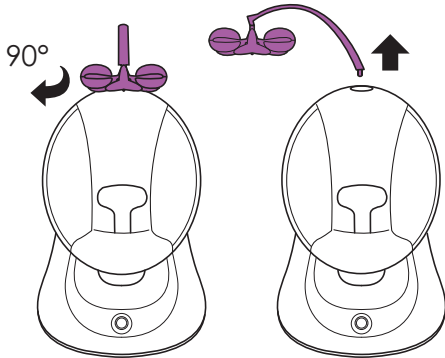


**1.**

Remove the toy bar. Turn 90 degrees so it is facing to the side, then remove.

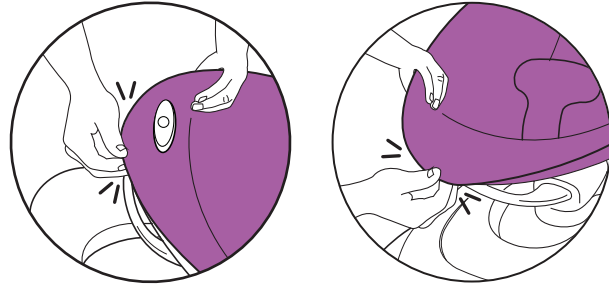


**2.**

Unsnap the fabric at the top and bottom.

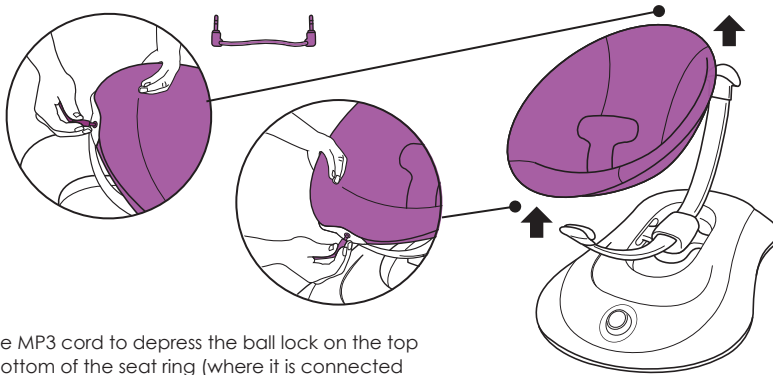


**3.**

Use the MP3 cord to depress the ball lock on the top and bottom of the seat ring (where it is connected to the center support arm). Remove seat ring.

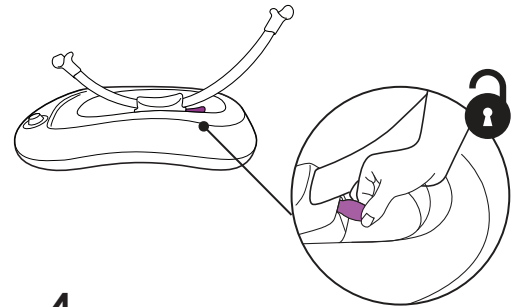

**4.**

Unlock the lever on the back of the rocking trolley.

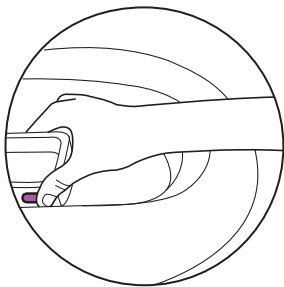

**5.**

Simultaneously press the buttons on the sides of the rocking trolley.

**6.**

Remove center support rail.

